


## DISCOVER THE MOMENTUM

Get ready to embrace the dynamic energy of Momentum, an exceptional series that propels your space to new heights. Each tile in this remarkable collection exudes a sense of movement and vitality, inspiring productivity and igniting creativity. Designed with a focus on style and performance, **Momentum Series** seamlessly blends contemporary aesthetics with outstanding durability. Its sleek and modern patterns, combined with a vibrant color palette, create an atmosphere that exudes confidence and forward-thinking. Step into the realm of unstoppable momentum and elevate your commercial space to new dimensions of style and functionality.

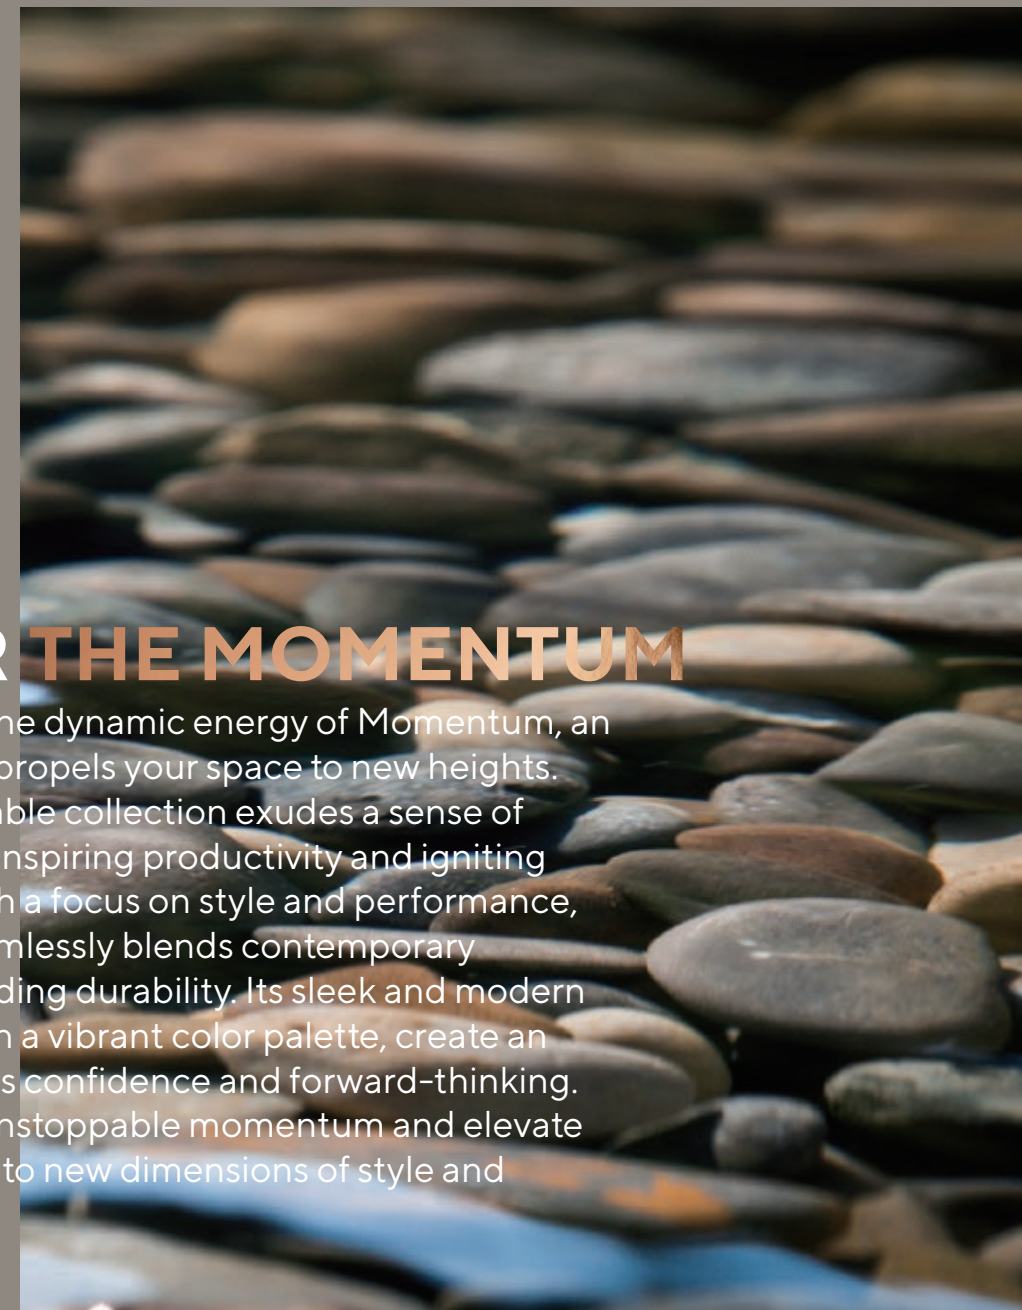

### SPECIFICATIONS

#### PRODUCT SPECIFICATIONS

Construction	Patterned Loop	
Fiber System	Premium PA6 Nylon (Polyamide)	
Dye Method	100% Solution Dyed	
Gauge	1/12	
Stitches	40 stitches/ 10 cm	10.15 stitches/ inch
Total Product Weight	4,613 g/m <sup>2</sup>	136.05 oz/yd <sup>2</sup>
Stain Protection	3M Scotchgard™	
Pre-Coat	VINNAPAS®	
Average Pile Thickness	3.8 mm	0.149 in
Total Product Thickness	6.5 mm ± 0.5	0.256 in ± 0.5
Backing System	OC EverBond™ Bac	
Standard Product Size	500 mm x 1000 mm	19.69 in x 39.37 in
Customisable Size	500 mm x 500 mm	19.69 in x 19.69 in
	250 mm x 1000 mm	9.84 in x 39.37 in
	1000 mm x 1000 mm	39.37 in x 39.37 in

#### PERFORMANCE

Product Certifications	CRI Green Label Plus & SIRIM Malaysia Standard (MS)
Surface Flammability	Passes CPSC FF 1-70 (ASTM D-2859)
Flooring Radiant Panel	Class 1 (mean average CRF: 0.45 w/sq cm or higher) (ASTM E-648)
Smoke Generation	Less than 450 (ASTM E-662)
Electrostatic Propensity	< 3.0 kV (AATCC 134)
Colourfastness	> 4 after 100 hours (AATCC 16E)
Antimicrobial	Pass (AATCC 174)
Country of Origin	Malaysia

#### ENVIRONMENTAL ATTRIBUTES

Total Recycled Content	Min. 35% Post-Consumer Material
Recycled Content	Yes


#### Product Notes:

1. Manufacturing process, temperature and humidity may have physical impact and effect on yarn, fibre and colour. These effect and impact have been duly considered in determining our product's specification and such specification may vary according to industry and manufacturing process tolerances.
2. Tufted Face Weight corresponds to the overall weight of yarn used in tufting process. Lower finished yarn weight in every end product may be the result of such tufting and shearing processes.
3. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
4. Slight difference in colour may appear in each production batch as a result of the usage of different dye lots.
5. The manufacturer may, without prior notice change the backing or other materials upon shortage of such backing or materials or upon availability of technical advancements which may result in the improvements towards the end product's performance.
6. All products are 100% recyclable.

#### Warranty Information

Fifteen (15) years limited warranty against excessive surface wear, static, delamination, edge ravel, zipping and backing resiliency loss. See warranty for more info and details. Please contact your Owlcee Contract representative for detailed specifications, limited warranty and sample requests.

#### Suggested Installation Method

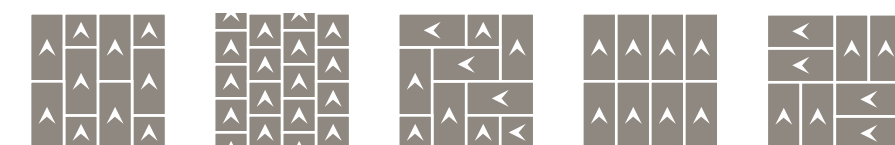

Ashlar

Herringbone

Monolithic

Parquet



www.owlcee.com

## VOLUME 14 | MOMENTUM



## VOLUME 14

### MOMENTUM

## DISCOVER THE POSSIBILITIES

OWLCEE CONTRACT  
by OWLCEE MILLS



Torx 300 Whispering Birch | Torx 500 Cappuccino Swirl | Torcx 313 Sapphire Shadows | Installed Ashlar




Torx 100 Graphite Drift



Torx 300 Whispering Birch



Torx 500 Cappucino Swirl

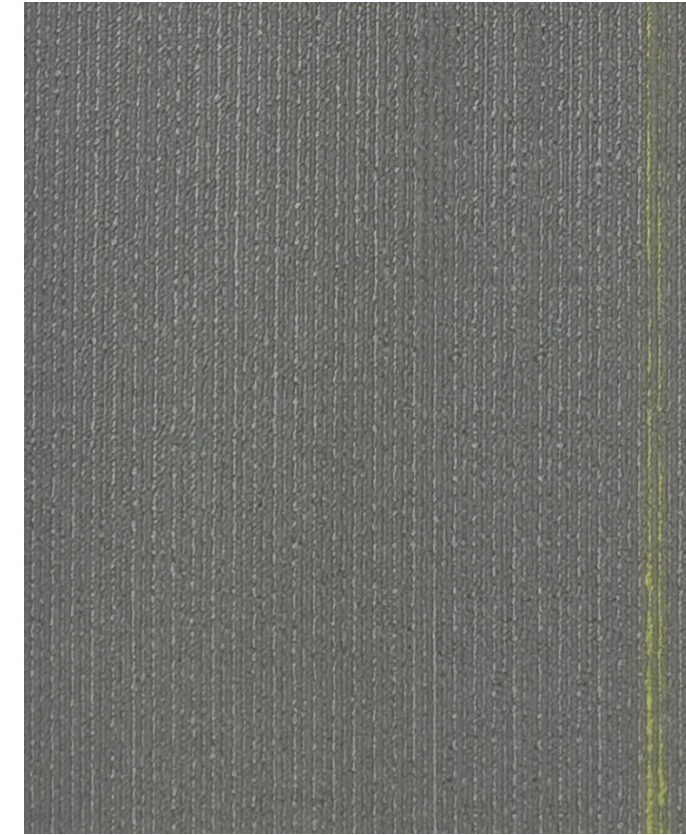

Torcx 121 Emerald Mist



Torcx 313 Sapphire Shadows



Torcx 542 Ruby Oak



Torx 200 Moonstone Ash



Torx 400 Sand Dune



Torx 600 Pebble Taupe



Torcx 223 Jade Fusion



Torcx 432 Sunlit Sand



Torcx 611 Coastal Breeze



Torx 400 Sand Dune | Torx 500 Cappucino Swirl | Torcx 611 Coastal Breeze Installed Ashlar